


FORK TONGUE TERMINAL

With insulation grip

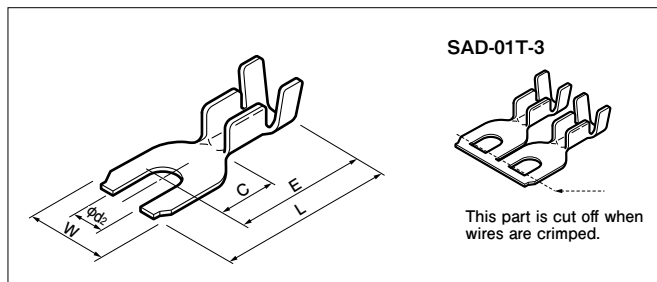


UL LISTED E42024 Certified LR20812

Model No.	Standard	Applicable wire			Material	Surface finish	Dimensions (mm)					Q'ty/reel	
		mm ²	AWG #	Insulation Q.D. (mm)			d ₂ (dia.)	E	L	C	W		Material thickness
SAA-51-3	UL LISTED Certified LR20812	0.5 to 2.0	20 to 14	2.6 to 3.8	Brass	—	3.2	13.0	16.8	5.8	7.2	0.5	7,500
SAA-51T-3						Tin-plated							
SAA-51-3.7						—							
SAA-51T-3.7						Tin-plated							
SAA-51T-4						Tin-plated							
SAB-51-5						—							
SAB-51T-5						Tin-plated							
*SAD-01T-3						Tin-plated							
		0.2 to 0.5	24 to 20	Approx. 2.0		3.2	11.0	14.7	5.2	6.3		5,000	

RoHS2 compliance SAD-01T-3 displays (SN) on a label.

Note: The terminal denoted by * is a twin lead fork terminal and is used for crimping 2 piece terminals simultaneously onto 2 parallel wires like the TV feeder wires.

Without insulation grip

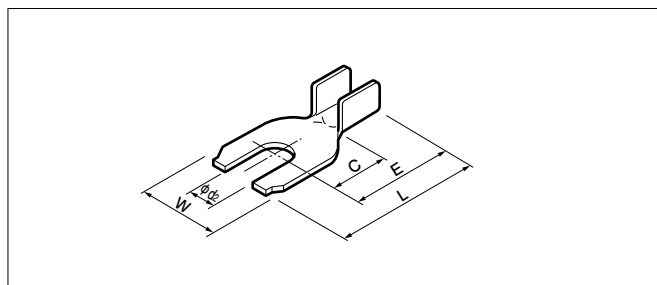


UL LISTED E42024 Certified LR20812

Model No.	Standard	Applicable wire		Material	Surface finish	Dimensions (mm)					Q'ty/reel	
		mm ²	AWG #			d ₂ (dia.)	E	L	C	W		Material thickness
SAA-50-3	UL LISTED Certified LR20812	0.5 to 2.0	20 to 14	Brass	—	3.2	10.0	13.8	6.0	7.2	0.5	10,000
SAA-50T-3.7					Tin-plated							
SAA-50-4					—							
SAA-50T-4					Tin-plated							

RoHS2 compliance

FORK TONGUE TERMINAL

Locking type (With insulation grip)

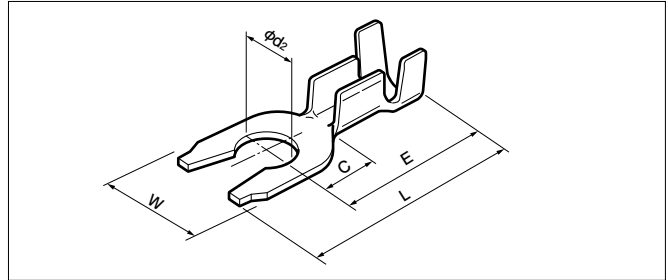

UL LISTED E42024 Certified LR20812

Model No.	Standard	Applicable wire			Material	Surface finish	Dimensions (mm)					Q'ty/reel	
		mm ²	AWG #	Insulation Q.D. (mm)			d ₂ (dia.)	E	L	C	W		Material thickness
SAA-21-3L	UL LISTED Certified	0.3 to 0.75	22 to 18	1.5 to 2.8	Brass	—	3.2	13.0	16.8	5.8	7.2	0.5	7,500
SAA-21T-3L						Tin-plated							
SAA-21-3.5L						—	3.7						
SAA-21T-3.5L						Tin-plated							
SAA-21-4L						—	4.3						
SAA-21T-4L						Tin-plated							

RoHS2 compliance

Crimping machine, Applicator

Contact	Crimping machine	Applicator	Crimp applicator with dies
SAA-21(T)-**	AP-K2N	MK-L	APLMK SAA21
SAA-50(T)-**			APLMK SAA50
SAA-51(T)-**			APLMK SAA51
SAB-51(T)-**			APLMK SAB51
SAD-01(T)-**			APLMK SAD01

Note: Contact JST for fully automatic crimping applicator.

- * In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- * RoHS2 compliance
- * Dimensional unit: mm
- * Contact JST for details.