




Solderless terminals

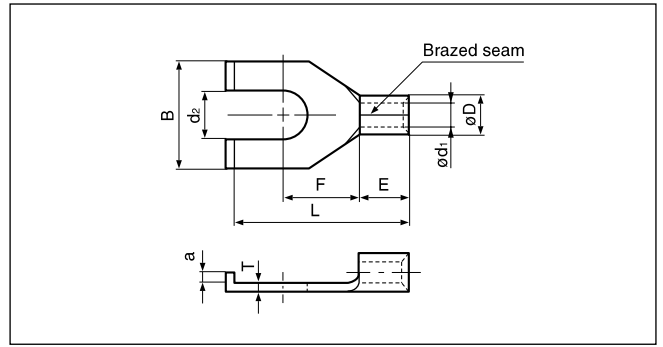

**FLANGED SPADE TONGUE (B type) Non-insulated**



Certificate No.: E42024 LR20812

Applicable Wire AWG#(mm <sup>2</sup> )	Stud size		Part No.	Standard	Dimensions mm (in.)										Tool No.	Qty/box
	American	Metric			d <sub>2</sub>	B	L	F	E	ø D	ø d <sub>1</sub>	a	T			
26 to 22 (0.2 to 0.5)	1-2	2	0.5-2B		2.2 (.087)	4.6 (.181)	11.6 (.457)	4.5 (.177)	4.0	2.0	1.0	1.0	0.5	YHT-2622 YA-1, YA-2 BCT-0514	1,000	
	8	4	0.5-4B		4.3 (.169)	7.0 (.276)	15.0 (.591)	6.3 (.248)	(.157)	(.079)	(.039)	(.039)	(.020)			
22 to 16 (0.25 to 1.65)	5-6	3.5	1.25-T3B		3.7 (.146)	6.4 (.252)	13.1 (.516)	5.1 (.201)	4.8 (.189)	3.4 (.134)	1.7 (.067)	1.0 (.039)	0.8 (.031)	YHT-2210 YA-1 YA-2 YA-4 BCT-0514	1,000	
	5-6	3.5	1.25-YS3B		3.7 (.146)	6.4 (.252)	14.2 (.559)	6.3 (.248)				0.8 (.031)				
	5-6	3.5	1.25-S3B		3.7 (.146)	7.5 (.295)	13.1 (.516)	5.1 (.201)				1.5 (.059)				
	5-6	3.5	1.25-3B		3.7 (.146)	8.5 (.335)	17.5 (.689)	7.2 (.284)				0.8 (.031)				
	8	4	1.25-YS4B		4.3 (.169)	6.4 (.252)	14.2 (.559)	6.3 (.248)				1.5 (.059)				
	8	4	1.25-S4B		4.3 (.169)	7.5 (.295)	13.1 (.516)	5.1 (.201)				0.8 (.031)				
	8	4	1.25-4B		4.3 (.169)	8.5 (.335)	18.5 (.728)	7.2 (.284)				1.5 (.059)				
	10	5	1.25-5B		5.3 (.209)	8.5 (.335)	18.5 (.728)	7.2 (.284)								
1/4	6	1.25-6B	6.4 (.252)	13.5 (.532)	24.0 (.945)	11.7 (.461)										
16 to 14 (1.04 to 2.63)	5-6	3.5	2-YS3B		3.7 (.146)	6.4 (.252)	14.4 (.567)	6.3 (.248)	4.8 (.189)	4.1 (.161)	2.3 (.091)	1.5 (.059)	0.8 (.031)	YHT-2210 YA-1 YA-2 YA-4 BCT-0514	1,000	
	5-6	3.5	2-T3B		3.7 (.146)	7.5 (.295)	13.5 (.532)	5.2 (.205)								
	5-6	3.5	2-S3B		3.7 (.146)	8.5 (.335)	14.8 (.583)	7.2 (.283)								
	5-6	3.5	2-3B		3.7 (.146)	8.5 (.335)	17.0 (.670)	7.2 (.283)								
	8	4	2-T4B		4.3 (.169)	7.5 (.295)	13.5 (.532)	5.2 (.205)								
	8	4	2-S4B		4.3 (.169)	8.5 (.335)	14.8 (.583)	7.2 (.283)								
	8	4	2-E4B		4.3 (.169)	8.5 (.335)	15.2 (.598)	7.3 (.287)								
	8	4	2-4B		4.3 (.169)	8.5 (.335)	17.0 (.670)	7.3 (.287)								
10	5	2-5B	5.3 (.209)	8.5 (.335)	17.0 (.670)	7.3 (.287)										
1/4	6	2-6B	6.4 (.252)	13.5 (.532)	24.0 (.945)	11.7 (.461)										
12 to 10 (2.63 to 6.64)	5-6	3.5	5.5-S3B		3.7 (.146)	7.6 (.299)	18.0 (.709)	6.2 (.244)	6.8 (.268)	5.6 (.221)	3.4 (.134)	1.5 (.059)	1.0 (.039)	YHT-2210 YA-1 YA-2 YA-4 BCT-0514	500	
	5-6	3.5	5.5-3B		3.7 (.146)	8.5 (.335)	19.5 (.768)	7.5 (.295)								
	8	4	5.5-S4B		4.3 (.169)	7.6 (.299)	18.0 (.709)	6.2 (.244)								
	8	4	5.5-4B		4.3 (.169)	8.5 (.335)	19.5 (.768)	7.5 (.295)								
	10	5	5.5-S5B		5.3 (.209)	7.6 (.299)	18.0 (.709)	6.2 (.244)								
	10	5	5.5-5B		5.3 (.209)	8.5 (.335)	19.5 (.768)	7.5 (.295)								
	1/4	6	5.5-6B		6.4 (.252)	13.5 (.532)	26.5(1.043)	12.2 (.480)								

Note:1) The part numbers indicated in the above table are for products with a braze seam.  
 When ordering products with a butted seam, add the prefix "WS" to the part number (ex. 2-4B → **WS2-4B**).  
 2) Delivery lead times may vary depending on the product. Contact JST for details.